
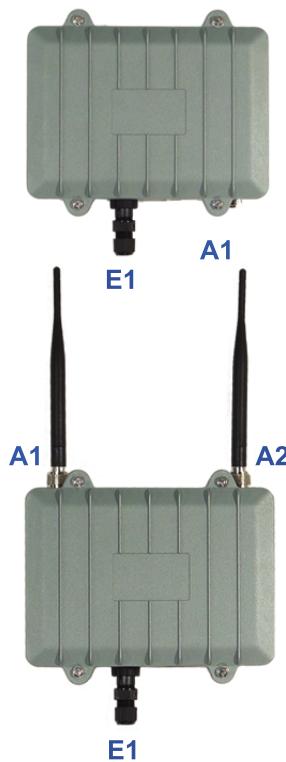


WRAP-BOX OUTDOOR WIRELESS ENCLOSURE

www.mini-box.com

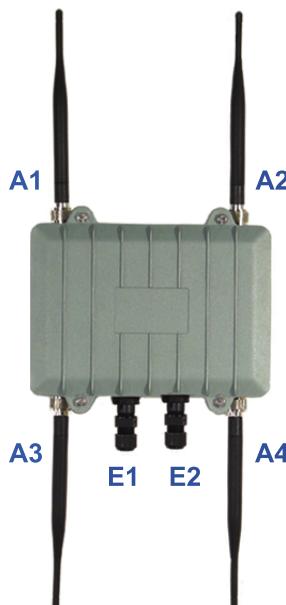

Industrial Die-Cast Aluminum Design

Designed to withstand the toughest environments, the WRAP-BOX outdoor enclosure is a small, light, yet very solid wireless outdoor enclosure. The WRAP-BOX is rated NEMA-67 providing complete protection against ingress of dust (6) as well as protection against immersion in water (7).



WRAP-BOX 2A1E on 1" mast

Multiple Antenna, Ethernet Options

The WRAP-BOX comes in 3 configurations:

- 1 N-Type connector + 1 RJ-45 quick disconnect (model 1A1E)
- 2 N-Type connectors + 1 RJ-45 quick disconnect (model 2A1E)
- 4 N-Type connectors + 2 RJ-45 quick disconnect (model 4A2E)

The N-Type antennas connectors are placed as far as possible from each other in order to increase spatial diversity and decrease RF grounding from the mounting mast. Multiple Antennas can be used for repeater operation, multiple band or MIMO "smart antenna" applications.

2nd RJ-45 connector (available only on the 4A2E model) can be used as optional ethernet or console port.

Two WRAP boards can be stacked inside the enclosure for increased throughput and/or dual Ethernet operation.

Features

- Die-Cast Aluminum, NEMA 67 rating
- 1, 2, 4 waterproof N-type Antenna options
- Waterproof, quick disconnect RJ-45 connector
- 3 point silicone-rubber gasket
- Pole-top and wall-mounting options
- OEM brand can be applied in front (serial & ID in the back)

Thermal Characteristics

- Enclosure Seal Operating temperature -60C to 230C
- Heat Trap: +6.5 Celsius under full sun (~100,000 Lux)
- Temperature rise using a 5-10Watt heat source (WRAP + radio board): +5.5 Celsius

Mechanical Characteristics

- Inside measurements: 180x125mm x 46mm
- Wall thickness: 3mm
- Supports masts up to 3" diameter

Board Support

- Native support for WRAP.2x boards
- Native support for nano-ITX boards
- Other boards types require mounting plate



Inside the WRAP-BOX 4A2E

All WRAP-box configs are shipped with poletop+U-bolts mounting hardware, RJ-45 female and field installable RJ-45 male + standoffs, screws and washers in a OEM white compartmented tab-locking box box.

Wallmount bracket, antennas and N-type connectors are optional.


Contact sales@mini-box.com for custom OEM configs and volume discounts.

www.mini-box.com

<http://www.mini-box.com>, email: sales@ituner.com



wall mount bracket



pole-top bracket + U-bolts

