

# ECS ELITEGROUP

## C7VCM 1.0

C7VCM VIA CN700 & VT8237R Plus Chipsets  
C7 CPU Onboard

### Features

- VIA C7 with 400MHz FSB

### System


|                       |  |
|-----------------------|--|
| CPU                   | V7 CPU Onboard 400MHz FSB(for nano BGA type CPU)   |
| System Memory         | 1 X 200-pin DDR SO DIMM max.up to 1GB  |
| Chipset               | VIA CN700 & VT8237R Plus   |
| Bios                  | AMI 4Mbit Flash ROM<br>Supports Plug and Play 1.0B, APM 1.2, Multi Boot, DMI<br>Supports ACPI revision 1.0 specification |
| Expansion Interface   | 1 X PCI expansion slot   |
| Battery               | Lithium 3V/220 mAh   |
| Size                  | 170 X 170 mm   |
| Operation Temperature | 0-60°C   |
| Operation Humidity    | 10%~90% relative humidity, non-condensing  |

### I/O



|          |  |
|----------|--|
| MIO      | 1 X ATA-100 IDE, 1 x PS/2 K/B, 1 X PS/2 MS, 2 X COM ( COM2 by header), 1 X LPT , 1 X VGA |
| Ethernet | Realtek RTL8100C Fast Ethernet controller  |
| Audio    | AC'97 Codec Audio  |
| USB      | 4 X USB 2.0 port (4 ports from 2 headers)  |

### Display

|                  |   |
|------------------|---|
| Chipset          | Integrated UniChrome Pro 3D / 2D Graphics         |
| Memory Size      | Max.up to 64MB frame buffer sharing system memory |
| Resolution       | CRT: 1600 X 1200; LCD: 1600 X 1200                |
| Output Interface | VGA port  |

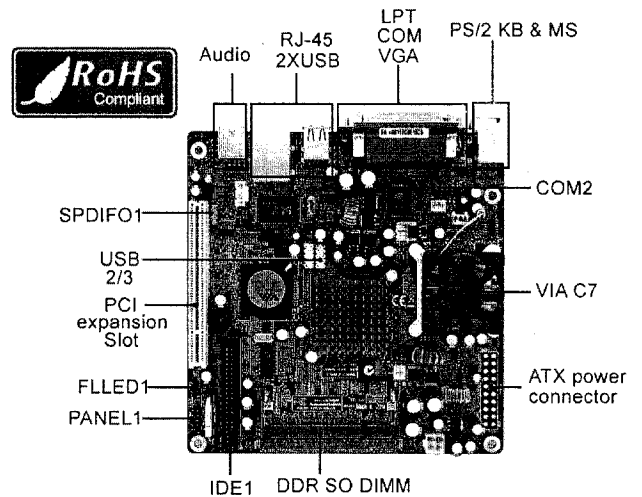

### Dimensions

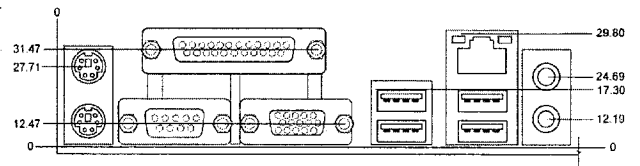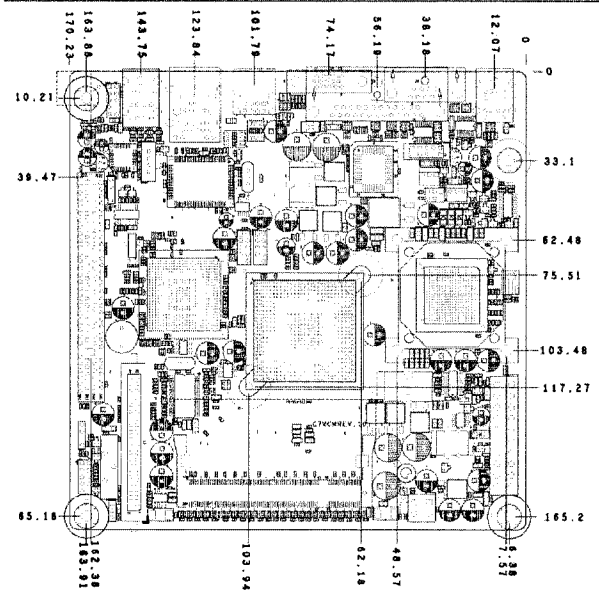

### Accessories

- 1 X IDE flat cable
- 1 X DC connector
- 1 X Driver CD
- 1 X I/O shield
- 1 X User Manual